


C02 SERIES



Model:	C02-24V-3528-72	Available Color			
Input Voltage:	24V DC	● 2200K-110lm	● Green	70lm	
Power/m:	5W (15-12-7-5) WATT on request	● 2500K-110lm	● Blue	13lm	
Working Mode:	PWM CV	● 2700K-110lm	● Pink	55lm	
LED Type:	SMD3528	● 3000K-110lm	● Red	40lm	
LED Qty / meter:	72pcs	● 3500K-120lm	● Amber	40lm	
Cutting Unit:	12LEDs	● 4000K-120lm	● Orange	32lm	
Cutting Length:	16.67cm	● 5000K-130lm	● RGB		
Max Length Single Feed:	49.21/15m	● 5700K-130lm			
		● 6500K-130lm			

Lumen Maintenance:70,000 Hours L70@ 25°C

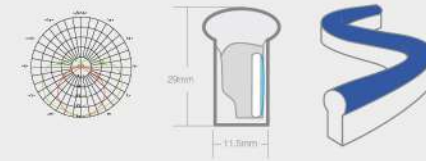

Material:
PVC/Silicon Optional



Waterproof rating
IP68



Beam Angle
120°



Min. Bending
80mm



Installation Temp.
0°C-55°C



Ambient Temp.
-25°C-55°C



Max Weight:
0.40kg/m



Dimmable:
DALI, 0-10V, DMX, Triac

CURVE