

FILM JET



CJ 125 Jet creates a 36mm thick water column using the same amount of water as a 16mm-orifice Smooth Bore .

The only difference is that film Jet's stream is hollow inside .

EFFICIENCY ●●●●●
VISIBILITY ●●●●● SOUND LEVEL ●●●●●
WIND RESISTANCE ●●●●● SPLASH / MIST ●●●●●




CJ125

CJ150

CJ200

Material Stainless Steel AISI 304 or 316 on request			
Inlet BSP/NPT	1¼"	1½"	2"
Nozzle Orifice	36 mm	41 mm	50 mm
Dimensions AxB in mm	43 x 158	48 x 180	60 x 240
Integrated Swivel Ball joint	Optional	Optional	Optional
Suction Strainer Openings Required	2.0 mm	2.0 mm	3.0 mm
Spray Height ▼	FLOW Head (LPM) [m]	FLOW Head (LPM) [m]	FLOW Head (LPM) [m]
1.0 m	59 1.9	144 2.0	
1.5 m	76 3.1	177 2.8	148 2.0
2.0 m	86 4.4	201 3.6	173 2.9
2.5 m	95 5.1	224 4.4	192 3.6
3.0 m	114 6.8	246 5.2	212 4.8
4.0 m		312 6.9	256 6.5
5.0 m		324 8.6	288 8.3
6.0 m		367 10.7	312 10.1
8.0 m			371 13.6

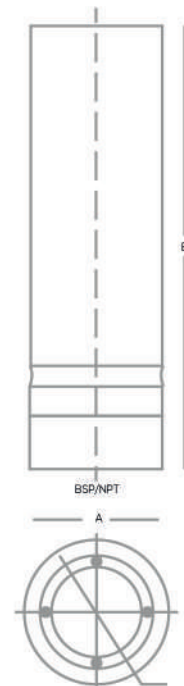



FILM JET

