




401001

IP68 IK10 CE 3 YEARS

FLARE

Smaller underwater projector, surface mounted .

Completely made in stainless steel AISI 304 L , Stainless steel 316 L on request
Silicon rubber gasket , with 3 Lumileds LUXEON LED .

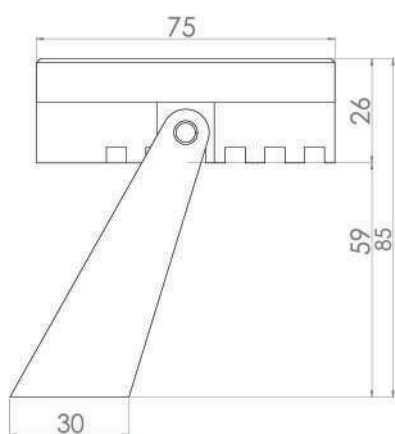

Technical data

Wattage	9 WATT
Voltage	12:24 V D.C
IP Rating	IP68 – 5 METERS DEPTH
IK Rating	IK10
Material	Completely made in stainless Steel AISI 304 L marine grade (or 316 on request)
Trim	stainless Steel AISI 304 L marine grade
Light source	3 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom length on request

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°10	1188	132
high-power led	°30	1098	122
°4000K neutral-white			
high-power led	°10	1278	142
high-power led	°30	1233	137
°6000K cool white			
high-power led	°10	1278	142
high-power led	°30	1233	137

Available color

RGB RGB-W RGB-NW RGB-ww BLUE ROYAL BLUE



Light beam available



Finish color options:

☐ Stainless Steel



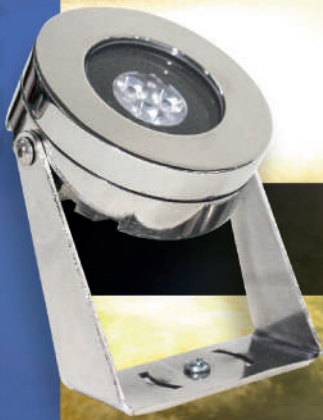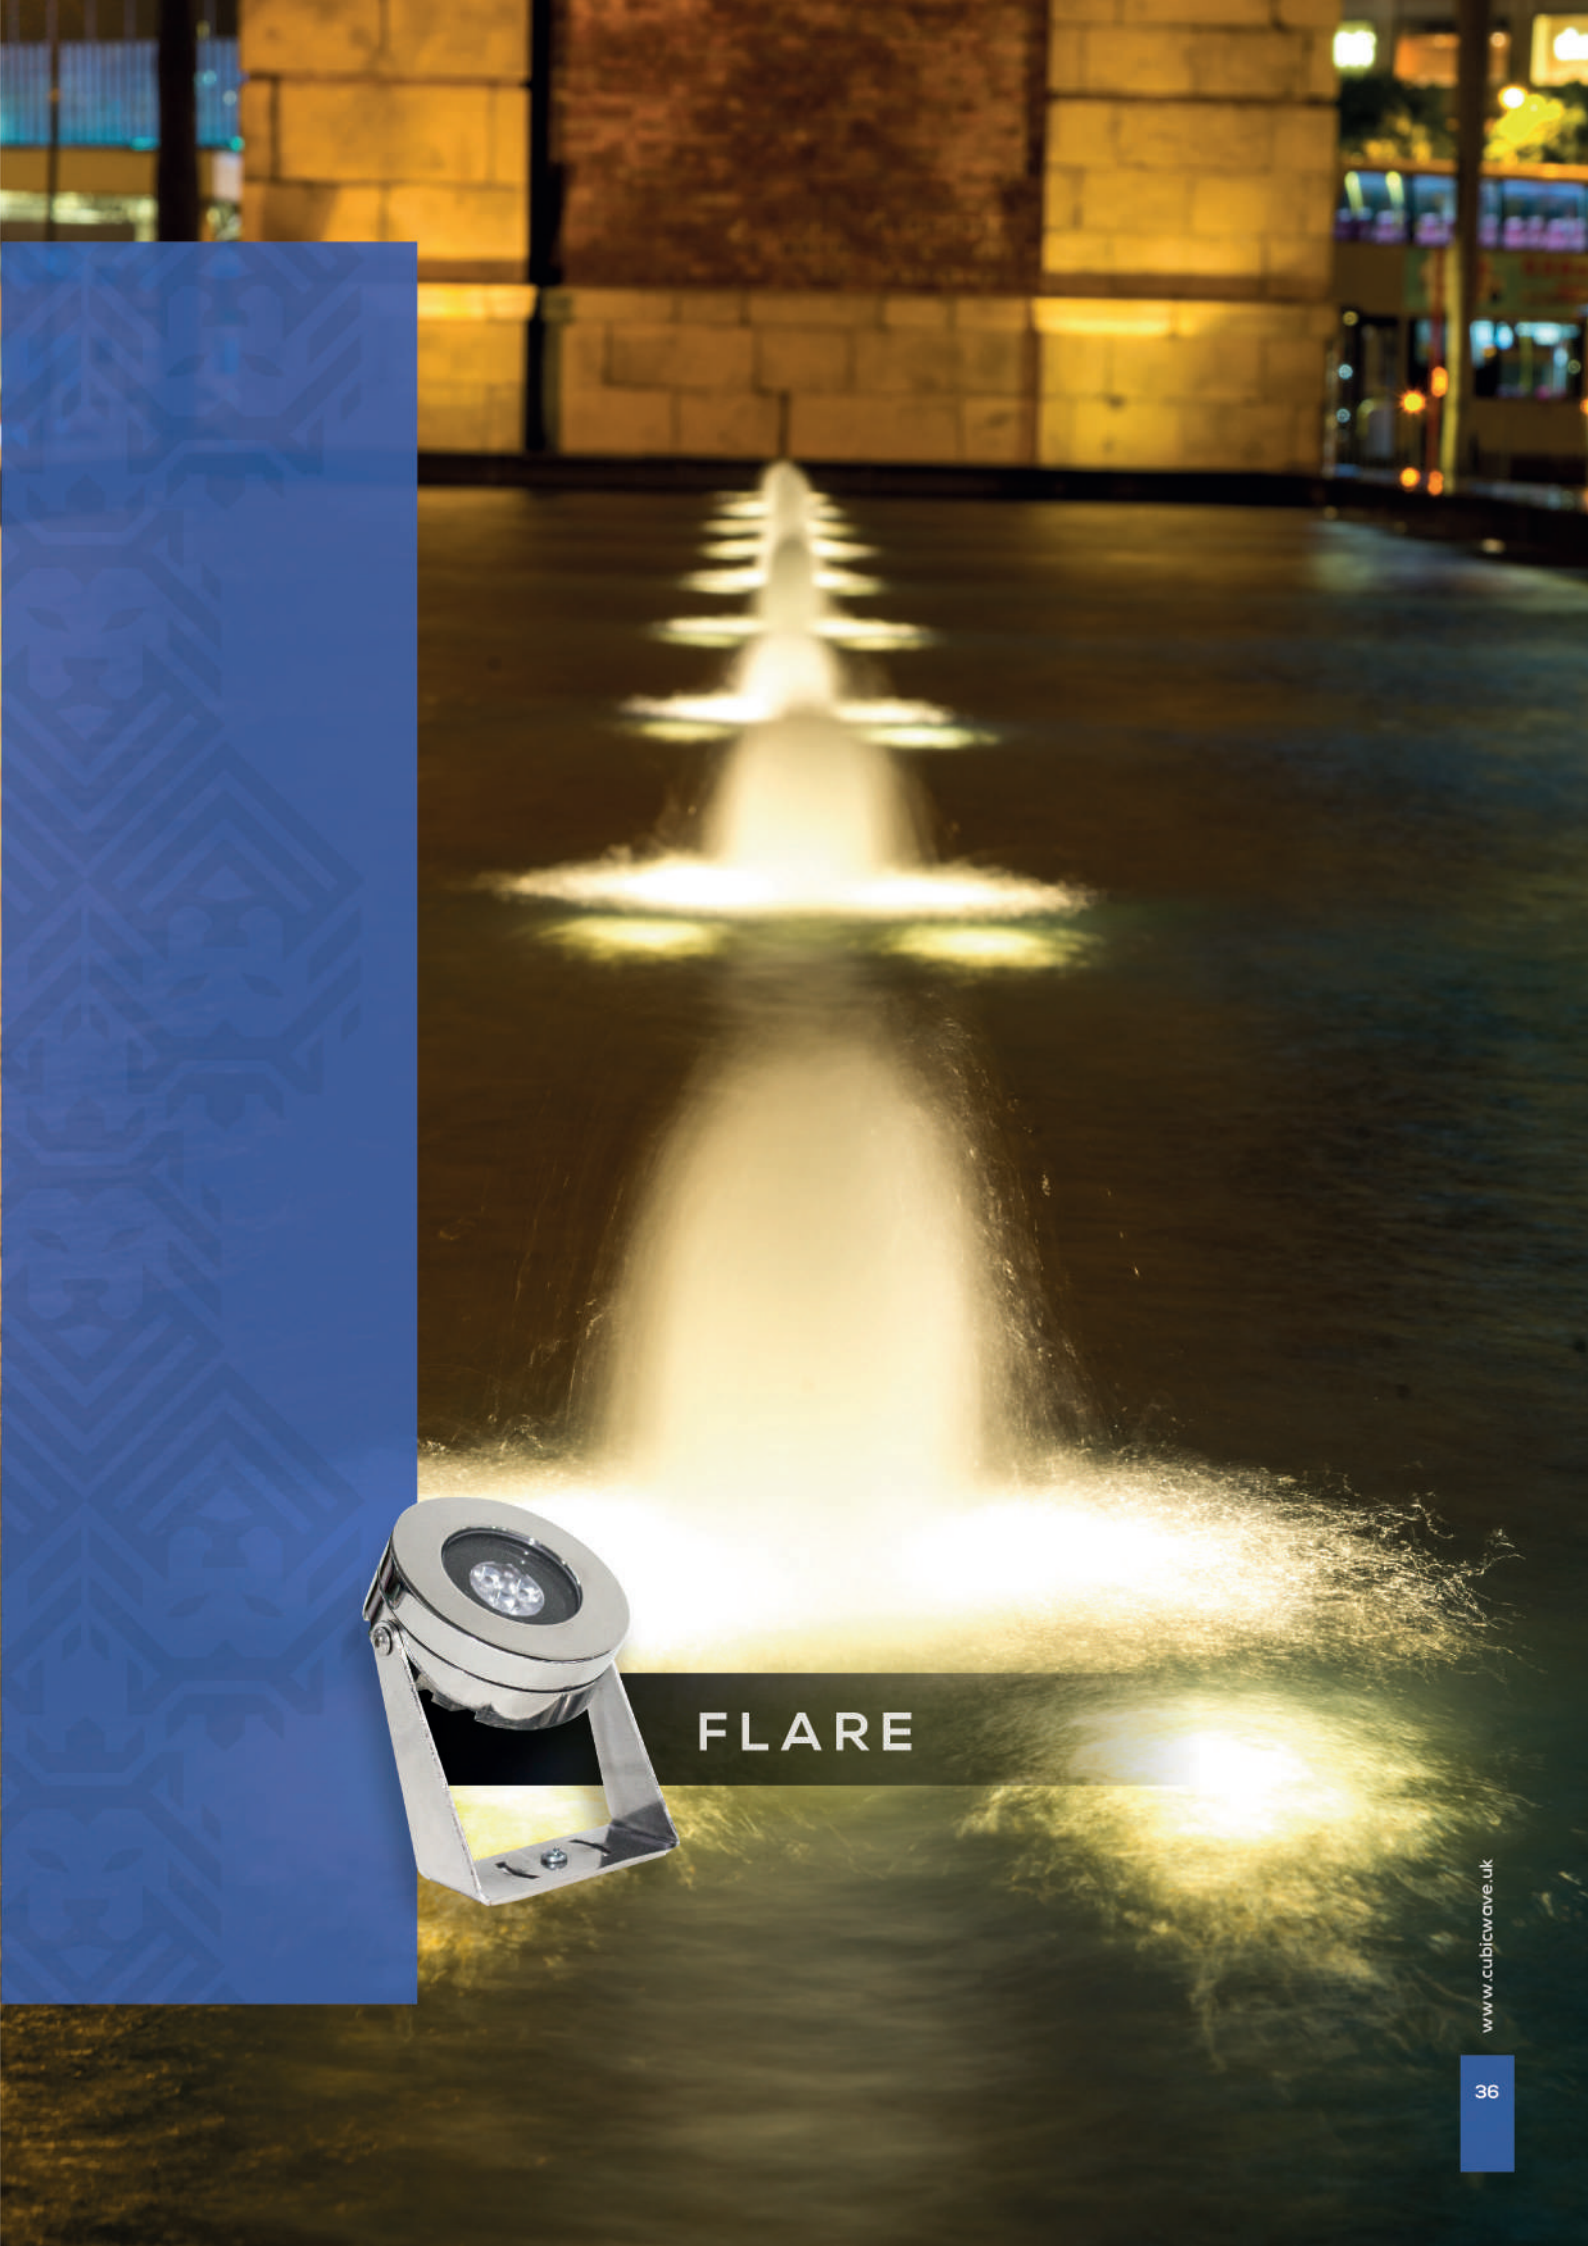

FLARE





Lumen	540 lm
Watt	9 W
Voltage	12-24 V.D.C


401004 **BLUE**



Lumen	855 lm
Watt	9 W
Voltage	12-24 V.D.C

401005 **ROYAL BLUE**

MONO ILLUMINATION




Lumen	450 lm
Watt	9 W
Voltage	12-24 V.D.C

401006 **RGB**




Lumen	warm white : 244 lm
Watt	8 W
Voltage	12-24 V.D.C

401007 **RGB-WW**



Lumen	natural white: 274 lm
Watt	8 W
Voltage	12-24 V.D.C

401008 **RGB-NW**



Lumen	cold white: 274 lm
Watt	8 W
Voltage	12-24 V.D.C

401009 **RGB-W**

VIVID ILLUMINATION



FLARE

PROTECTION SYSTEM

- Reverse Polarity protection .
- Over current protection .
- Over voltage protection .
- Short circuit LED protection .
- Open circuit LED protection .
- Thermal shutdown protection .