


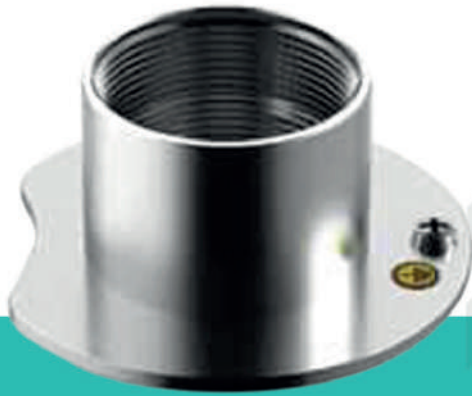


Floor/Wall Fittings

- Professional, heavy duty solution
- Made entirely of AISI 304 Stainless Steel (or 316 on request)
- Ideal for floor/wall penetrations and a wide range of applications
- All models feature HydroStop Flange
Can be made in custom size

Floor/Wall fittings are made of pure corrosion resistant AISI 304 stainless steel (or 316 on request) and they serve the purpose of watertight penetrations through concrete slabs for a multitude of applications like supply lines drain lines, cable transitions, nozzles & fountain heads mounting and virtually anything that has to pass through concrete.


There are male and female threaded fittings a heavy duty flange model and some can be simply pushed into pvc pipes .

All models can be tailor made in custom height to meet specific requirements .

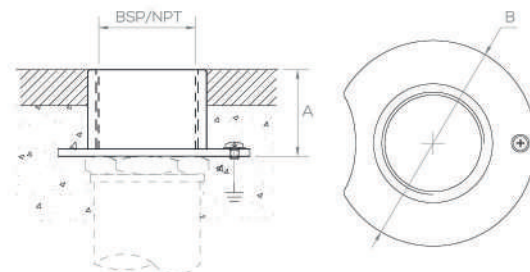

WF Model
Floor/Wall Fitting

Model	BSP / NPT	A mm	B mm
WF 100	1"	38	88
WF 150	1½"	45	110
WF 200	2"	48	114
WF 250	2½"	60	140
WF 300	3"	65	150
WF 400	4"	75	185

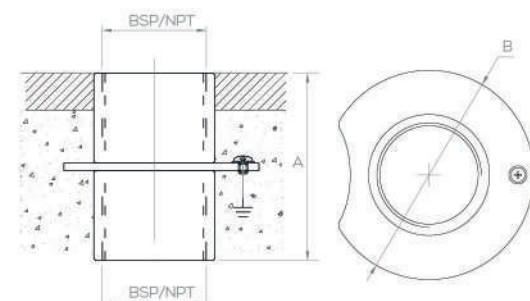

IF Model
Female-Female Floor/Wall Fitting

Model	BSP / NPT	A mm	B mm
WF 100	1"	82	88
WF 150	1½"	93	100
WF 200	2"	102	114
WF 250	2½"	124	140
WF 300	3"	134	150
WF 400	4"	155	185

WI Model

Male-Male Floor/Wall Fitting

Model	BSP / NPT	A mm	B mm
TI 100	1"	200	74
TI 150	1½"	200	88
TI 200	2"	200	100
TI 250	2½"	200	113
TI 300	3"	200	130
TI 400	4"	200	160
TI 500	5"	250	220
TI 600	6"	250	250

WV Model

Male-Female Floor/Wall Fitting

Model	BSP / NPT	A mm	B mm	C mm
TK 100	1"	200	88	40
TK 150	1½"	200	100	45
TK 200	2"	200	114	50
TK 250	2½"	200	140	60
TK 300	3"	200	150	65
TK 400	4"	200	185	75
TK 500	5"	250	270	80

WA Model

Female-Female Floor/Wall Fitting

Model	BSP / NPT	A mm	B mm
TI 100	1"	200	74
TI 150	1½"	200	88
TI 200	2"	200	100
TI 250	2½"	200	113
TI 300	3"	200	130
TI 400	4"	200	160

WM Model

Male-Flange Floor/Wall Fitting

Model	BSP / NPT	A mm	B mm	C mm	D mm
TK 100	2"	165	50	200	100
TK 150	3"	185	50	200	100
TK 200	4"	220	50	200	100
TK 250	6"	285	70	300	100