



SOLIS


501001

Technical features

IP68 IK08 CE 3 YEARS



With the latest innovations, the new SOLIS Wall Mounted Spot version offers a luminous intensity increased by two with the same power consumption, Even the lifespan has been improved with the new heat sink technology and the use of the latest LED technology. with 3 LUMILEDS LUXEON LEDs.

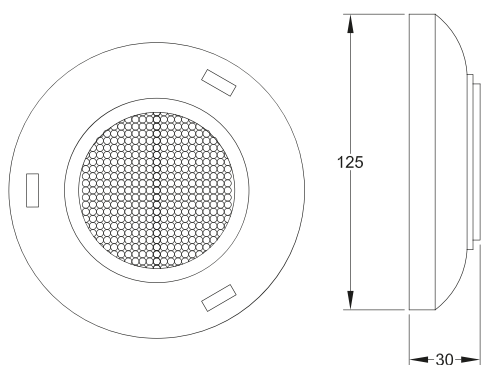

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°120	564	94
°4000K neutral-white			
high-power led	°120	612	102
°6000K cool white			
high-power led	°120	612	102

Technical data

Wattage	6 WATT
Voltage	10 :15 V A.C
IP Rating	IP68 – 5 METERS DEPTH
IK Rating	IK08
Material	P.C

Trim	stainless Steel AISI 304 L marine grade
Light source	3 high power led LUMILEDS -LUXEON
Life Span L70	75.000 HRS
Screws	silicone rubber
Gasket	PC
Lens	PMMA

Cable gland	3 mt. (NEXANS, HAR) power cable included standard or custom lengthon request
-------------	--



Available color

RGB RGB-W RGB-NW RGB-ww BLUE ROYAL BLUE

Light beam available



Finish color options:


☐ Shiny White






SOLIS





Lumen	360 lm
Watt	6 W
Voltage	12:24 V.A.C


501004 **BLUE**



Lumen	480 lm
Watt	6 W
Voltage	12:24 V.D.C


501005 **ROYAL BLUE**

MONO ILLUMINATION




Lumen	520 lm
Watt	9 W
Voltage	12:24 V.D.C

501006 **RGB**




Lumen	warm white : 732 lm
Watt	24 W
Voltage	12:24 V.D.C

501007 **RGB-WW**



Lumen	natural white: 822 lm
Watt	24 W
Voltage	12:24 V.D.C

501008 **RGB-NW**



Lumen	cold white: 822 lm
Watt	24 W
Voltage	12:24 V.D.C

501009 **RGB-W**

VIVID ILLUMINATION



PROTECTION SYSTEM

- Reverse Polarity protection .
- Over current protection .
- Over voltage protection .
- Short circuit LED protection .
- Open circuit LED protection .
- Thermal shutdown protection .