

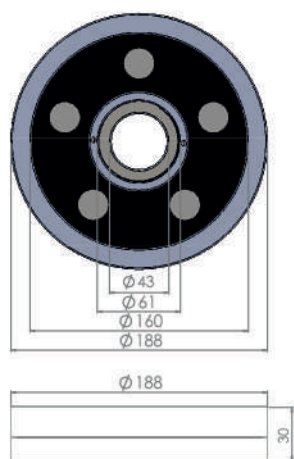


602001

IP68 IK10 CE 3 YEARS

ULTRA 150

Underwater projector, Fountain ring .
Completely made in stainless steel
AISI 304 L Stainless steel 316 L on request
Silicon rubber gasket , with 15 Lumileds
LUXEON LED .



Technical data

Wattage	22 WATT
Voltage	12:24 V D.C
IP Rating	IP68 – 5 METERS DEPTH
IK Rating	IK10
Material	Completely made in stainless Steel AISI 304 L marine grade (or 316 on request)
Trim	stainless Steel AISI 304 L marine grade
Light source	15 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom length on request
Light distance	16 meter



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°10	2904	132
high-power led	°30	2684	122
°4000K neutral-white			
high-power led	°10	3124	142
high-power led	°30	3014	137
°6000K cool white			
high-power led	°10	3124	142
high-power led	°30	3014	137

Available color

RGB RGB-W RGB-NW RGB-ww BLUE ROYAL BLUE

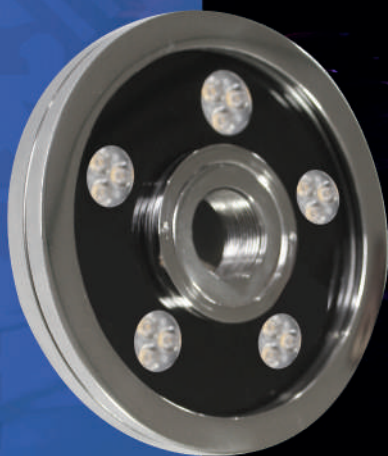
Light beam available



Finish color options:

☐ Stainless Steel






ULTRA 150





Lumen	1320 lm
Watt	22W
Voltage	12-24 V.D.C

901004 BLUE


Lumen	2090 lm
Watt	22 W
Voltage	12-24 V.D.C

901005 ROYAL BLUE


MONO ILLUMINATION




Lumen	1100 lm
Watt	22 W
Voltage	12-24 V.D.C

901006 RGB


Lumen	warm white : 732 lm
Watt	24 W
Voltage	12-24 V.D.C

901007 RGB-WW


Lumen	natural white: 822
Watt	24 W
Voltage	12-24 V.D.C

901008 RGB-NW


Lumen	cold white: 822
Watt	24 W
Voltage	12-24 V.D.C

901009 RGB-W

ULTRA 150

PROTECTION SYSTEM

- Reverse Polarity protection .
- Over current protection .
- Over voltage protection .
- Short circuit LED protection .
- Open circuit LED protection .
- Thermal shutdown protection .