



ULTRA BLAZE


902001

Technical features

IP68 IK10 CE 3 YEARS



Underwater projector, Fountain stand
Completely made in stainless steel
AISI 304 L. Stainless steel 316 L on request
Silicon rubber gasket, with 15 Lumileds
LUXEON LED.

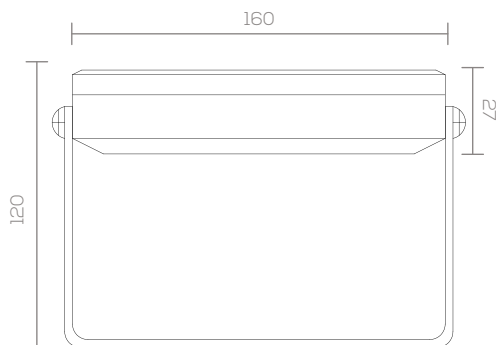

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°10	2904	132
high-power led	°30	2684	122
°4000K neutral-white			
high-power led	°10	3124	142
high-power led	°30	3014	137
°6000K cool white			
high-power led	°10	3124	142
high-power led	°30	3014	137

Available color

RGB RGB-W RGB-NW RGB-ww BLUE ROYAL BLUE

Light beam available




Finish color options:

☐ Stainless Steel

Technical data

Wattage	27 WATT
Voltage	12:24 V D.C
IP Rating	IP68 - 5 METERS DEPTH
IK Rating	IK08
Material	Completely made in stainless Steel AISI 304 L marine grade (or 316 on request)
Trim	stainless Steel AISI 304 L marine grade
Light source	15 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom length on request

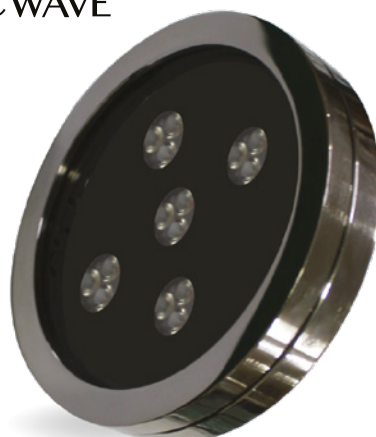




ULTRA BLAZE



Lumen	1320 lm
Watt	22 W
Voltage	12-24 V.D.C


902004 **BLUE**



Lumen	2090 lm
Watt	22 W
Voltage	12-24 V.D.C

902005 **ROYAL BLUE**

MONO ILLUMINATION




Lumen	1100 lm
Watt	22 W
Voltage	12-24 V.D.C

902006 **RGB**




Lumen	warm white : 732 lm
Watt	24 W
Voltage	12-24 V.D.C

902007 **RGB-WW**



Lumen	natural white: 822
Watt	24 W
Voltage	12-24 V.D.C

902008 **RGB-NW**



Lumen	cold white: 822
Watt	24 W
Voltage	12-24 V.D.C

902009 **RGB-W**

VIVID ILLUMINATION



ULTRA BLAZE

PROTECTION SYSTEM

- Reverse Polarity protection .
- Over current protection .
- Over voltage protection .
- Short circuit LED protection .
- Open circuit LED protection .
- Thermal shutdown protection .