




406001

IP68 IK10 CE 3 YEARS

WALL FLARE 150

Underwater projector, Fountain stand
Completely made in stainless steel
AISI 304 L. Stainless steel 316 L on request
Silicon rubber gasket, with 4 Lumileds
LUXEON LED.

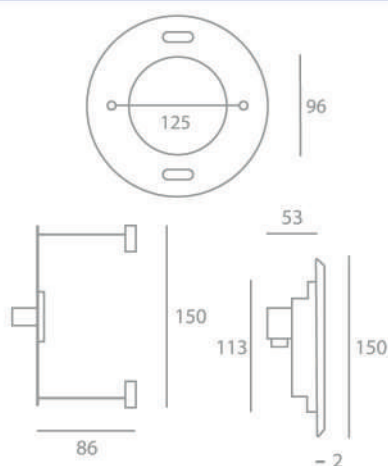

Technical data

Wattage	14 WATT
Voltage	12:24 V D.C
IP Rating	IP68 - 5 METERS DEPTH
IK Rating	IK08
Material	Completely made in stainless Steel AISI 304 L marine grade (or 316 on request)
Trim	stainless Steel AISI 304 L marine grade
Light source	4 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom length on request

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°10	2112	132
high-power led	°30	1952	122
°4000K neutral-white			
high-power led	°10	2272	142
high-power led	°30	2192	137
°6000K cool white			
high-power led	°10	2272	142
high-power led	°30	2192	137

Available color

RGB RGB-W RGB-NW RGB-ww BLUE ROYAL BLUE

Light beam available



Finish color options:





WALL FLARE 150





Lumen	960 lm
Watt	16 W
Voltage	12-24 V.D.C

BLUE

406004




Lumen	1520 lm
Watt	16 W
Voltage	12-24 V.D.C

ROYAL BLUE

406005

MONO ILLUMINATION



Lumen	900 lm
Watt	18 W
Voltage	12-24 V.D.C

RGB


406006



Lumen	warm white : 549 lm
Watt	18 W
Voltage	12-24 V.D.C

RGB-WW


406007



Lumen	natural white: 616 lm
Watt	18 W
Voltage	12-24 V.D.C

RGB-NW

406008



Lumen	cold white: 616 lm
Watt	18 W
Voltage	12-24 V.D.C

RGB-W

406009

VIVID ILLUMINATION



WALL FLARE 150

PROTECTION SYSTEM

- Reverse Polarity protection .
- Over current protection .
- Over voltage protection .
- Short circuit LED protection .
- Open circuit LED protection .
- Thermal shutdown protection .