



407001


Technical features

IP68 IK10 CE 3 YEARS



WALL FLARE 250

Underwater projector, Fountain stand
 Completely made in stainless steel
 AISI 304 L. Stainless steel 316 L on request
 Silicon rubber gasket , with 8 Lumileds
 LUXEON LED .

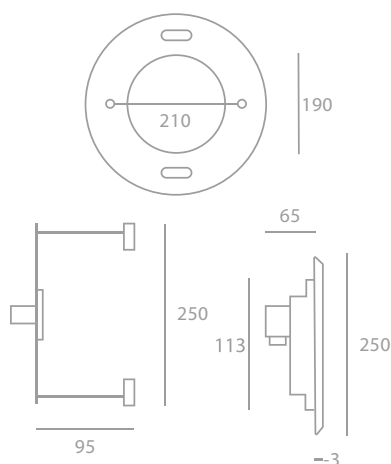**Technical data**

Wattage	47 WATT
Voltage	24 V D.C
IP Rating	IP68 – 5 METERS DEPTH
IK Rating	IK10
Material	Completely made in stainless Steel AISI 304 L marine grade (or 316 on request)
Trim	stainless Steel AISI 304 L marine grade
Light source	8 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom length on request



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°10	5405	115
high-power led	°30	5170	110
°4000K neutral-white			
high-power led	°10	5546	118
high-power led	°30	5358	114
°6000K cool white			
high-power led	°10	5546	118
high-power led	°30	5358	114

Available color

RGB
 RGB-W
 RGB-NW
 RGB-ww
 BLUE
 ROYAL BLUE

Light beam available**Finish color options:**




WALL FLARE 250





Lumen	2820 lm
Watt	47 W
Voltage	24 V.D.C

407004 **BLUE**




Lumen	4465 lm
Watt	47 W
Voltage	24 V.D.C

407005 **ROYAL BLUE**




MONO ILLUMINATION




Lumen	2350 lm
Watt	47 W
Voltage	24 V.D.C

407006 **RGB**




Lumen	warm white : 1433 lm
Watt	47 W
Voltage	24 V.D.C

407007 **RGB-WW**



Lumen	natural white: 1608 lm
Watt	47 W
Voltage	24 V.D.C

407008 **RGB-NW**



Lumen	cold white: 1608 lm
Watt	47 W
Voltage	24 V.D.C

407009 **RGB-W**

VIVID ILLUMINATION



WALL FLARE 250

PROTECTION SYSTEM

- Reverse Polarity protection .
- Over current protection .
- Over voltage protection .
- Short circuit LED protection .
- Open circuit LED protection .
- Thermal shutdown protection .