




WALL FLARE 30

403001

IP68 IK10 CE 3 YEARS

Smaller underwater projector, surface mounted .

Completely made in stainless steel AISI 304 L ,Stainless steel 316 L on request
Silicon rubber gasket , with 1 Lumileds LUXEON LED .

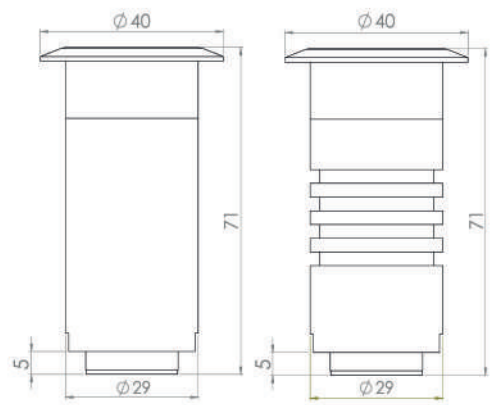

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°10	396	132
high-power led	°30	366	122
°4000K neutral-white			
high-power led	°10	426	142
high-power led	°30	411	137
°6000K cool white			
high-power led	°10	426	142
high-power led	°30	411	137

Available color

RGB BLUE ROYAL BLUE

Light beam available



Finish color options:

Stainless Steel

Technical data

Wattage	3 WATT
Voltage	12:24 V.D.C
IP Rating	IP68 - 5 METERS DEPTH
IK Rating	IK10
Material	Completely made in stainless Steel AISI 304 L marine grade (or 316 on request)
Trim	stainless Steel AISI 304 L marine grade
Light source	1 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom length on request





WALL FLARE 30





403004 BLUE


Lumen	180 lm
Watt	3 W
Voltage	12-24 V.D.C



403005 ROYAL BLUE

Lumen	285 lm
Watt	3 W
Voltage	12-24 V.D.C

MONO ILLUMINATION



403006 RGB

Lumen	150 lm
Watt	3 W
Voltage	12-24 V.D.C

VIVID ILLUMINATION



WALL FLARE 30

PROTECTION SYSTEM

- Reverse Polarity protection .
- Over current protection .
- Over voltage protection .
- Short circuit LED protection .
- Open circuit LED protection .
- Thermal shutdown protection .