



Air WALL FLARE 50


509001

Technical features

IP68 IK10 CE 3 YEARS 

Smaller underwater projector, surface mounted.

Completely made in stainless steel AISI 304 L, Stainless steel 316 L on request. Silicon rubber gasket, with 3 Lumileds. Air cooling with low thermal resistance LED technology.

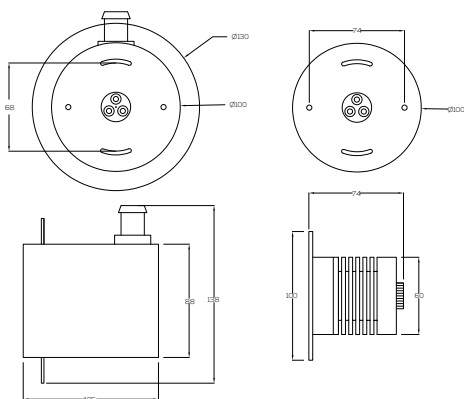

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°10	630	90
high-power led	°30	602	86
°4000K neutral-white			
high-power led	°10	644	92
high-power led	°30	616	88
°6000K cool white			
high-power led	°10	644	92
high-power led	°30	616	88

Available color

 RGB  BLUE  ROYAL BLUE

Light beam available



Finish color options:

 Stainless Steel

Technical data

Wattage	7 WATT
Voltage	12:24 V D.C
IP Rating	IP68 – 5 METERS DEPTH
IK Rating	IK10
Material	Completely made in stainless Steel AISI 304 L marine grade (or 316 on request)
Trim	stainless Steel AISI 304 L marine grade
Light source	3 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom length on request
Life Time L70	70.000hrs





Air
WALL FLARE 50