



501001

Technical features

IP 68

IK 10



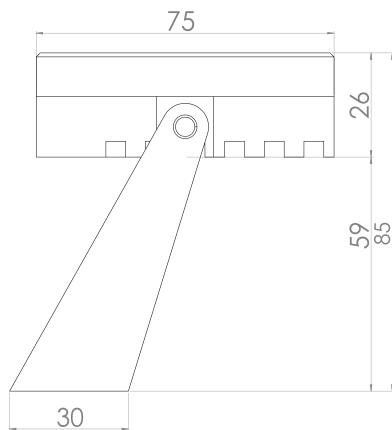
3 YEARS



FLARE *Air*

Smaller underwater projector, surface mounted .

Completely made in stainless steel AISI 304 L , Stainless steel 316 L on request
Silicon rubber gasket , with 3 Lumileds
Air cooling with low thermal resistance
LED technology .

**Technical data**

Wattage	9 WATT
Voltage	12:24 V D.C
IP Rating	IP68 – 5 METERS DEPTH
IK Rating	IK10
Material	Completely made in stainless Steel AISI 304 L marine grade (or 316 on request)
Trim	stainless Steel AISI 304 L marine grade
Light source	3 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom length on request
Life Time L70	70.000hrs



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°10	630	90
high-power led	°30	602	86
°4000K neutral-white			
high-power led	°10	644	92
high-power led	°30	616	88
°6000K cool white			
high-power led	°10	644	92
high-power led	°30	616	88

Available color

RGB
 RGB-W
 RGB-NW
 RGB-ww
 BLUE
 ROYAL BLUE

Light beam available**Finish color options:**

☐ Stainless Steel



CUBICWAVE®





FLARE *Air*