

ULTRA FOAM JET



EFFICIENCY ●●●●●
 VISIBILITY ●●●●● SOUND LEVEL ●●●●●
 WIND RESISTANCE ●●●●● SPLASH / MIST ●●●●●


By mixing air with water , the pattern appears to be extremely high-volume. Nevertheless the nozzles actually have a low water requirment .
 The beautiful soft foam jet offers a strong contrast to its enviroment .



UW100

UW150

Material	Stainless Steel AISI 304 or 316 on request	
Inlet BSP/NPT	1"	1½"
Nozzle Orifice	32 mm	50 mm
Dimensions AxB in mm	60 x 158	80 x 197
Integrated Swivel Ball joint	Optional	Optional
Suction Strainer Openings Required	3.0 mm	4.0 mm
Spray Height ▼	FLOW Head (LPM) [m]	FLOW Head (LPM) [m]
0.5 m	61 1.5	125 1.2
1.0 m	83 2.7	185 2.2
1.5 m	100 4.1	217 3.0
2.0 m	115 5.4	245 3.7
2.5 m	127 6.3	272 4.6
3.0 m	138 7.6	296 5.4
3.5 m	149 8.8	317 6.3
4.0 m	163 10.1	340 7.1
4.5 m		365 8.1
5.0		384 8.9
6.0		426 11.0

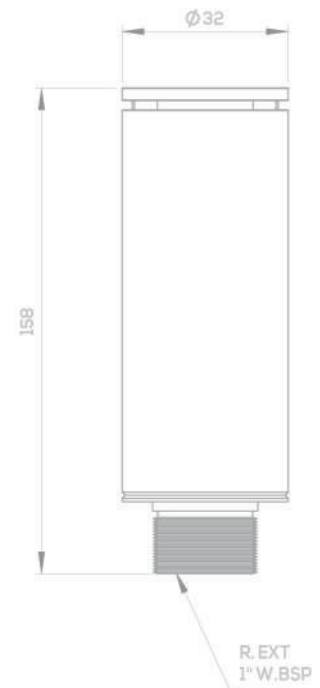



ULTRA FOAM JET