



## WALL FLARE 200


4061011

### Technical features

IP68 IK10 CE 3 YEARS



Underwater projector, Fountain stand  
Completely made in stainless steel  
AISI 316 L. Stainless steel.  
Silicon rubber gasket, with 15 Lumileds  
LUXEON LED.

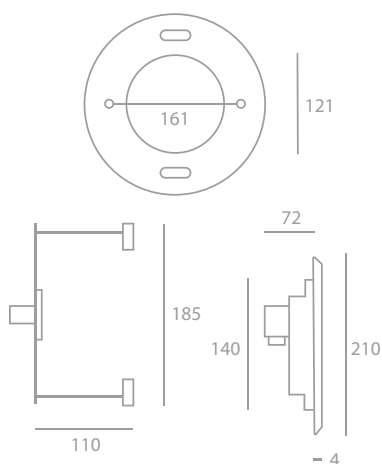

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>°3000K warm-white</b>			
high-power led	°10	3220	92
high-power led	°30	3150	90
<b>°4000K neutral-white</b>			
high-power led	°10	3360	96
high-power led	°30	3290	94
<b>°6000K cool white</b>			
high-power led	°10	3465	99
high-power led	°30	3360	96

### Available color

RGB RGB-W RGB-NW RGB-ww BLUE ROYAL BLUE

### Light beam available



### Finish color options:



### Technical data

Wattage	35 WATT
Voltage	12:24 V.D.C
IP Rating	IP68 - 5 METERS DEPTH
IK Rating	IK10
Material	Completely made in stainless Steel AISI 316 L marine grade
Trim	stainless Steel AISI 316 L marine grade
Light source	15 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom length on request



CUBICWAVE®





WALL FLARE 200